

Your drawings and notes

Last release

General data

Dimensional class:	medium
Standard colour:	green
Pitches:	metric 5 mm, 10 mm (.197 in, .394 in)
Stripping length:	10 mm (.39 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulating material group:	I (CTI ≥ 600V)
Self-extinguishing class UL94:	V0
Insulation resistance:	>10 ⁹ Ω (500V DC)

Data according to

UL 1059



300 V - 12 A - 30÷12 AWG stranded for 5 mm (.197 in) pitch
 600 V - 12 A - 30÷12 AWG stranded for 10 mm (.394 in) pitch

IEC EN 61984

300 V - 12 A - 2.5 mm² - for 5 mm pitch
 600 V - 12 A - 2.5 mm² - for 10 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it.
 The certifications of some product's versions could be pending, for more detailed and updated data
 please refer to our web site www.sauro.net or your representative Sales Manager.

Please see "CONNECTORS COMBINATIONS"

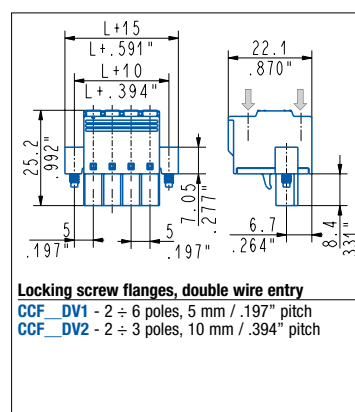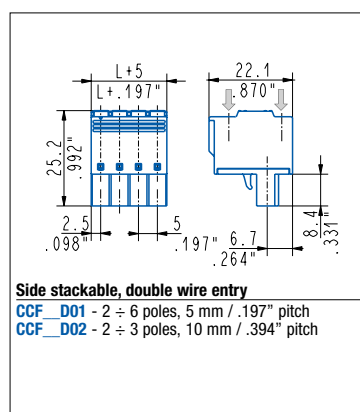

Usable with:

CIM

Page 71

CIMH

Page 73

CPM high

Page 75

CIMH normo

Page 78

CGM

Page 79

CIF-LC1

Page 83

