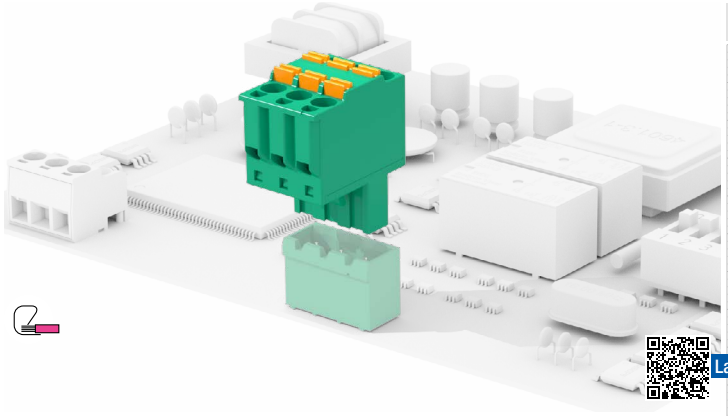

Last release

Your drawings and notes

General data

Dimensional class:	medium
Standard colour:	green
Pitches:	metric 5 mm, 10 mm (.197 in, .394 in)
Stripping length:	10 mm (.39 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulating material group:	I (CTI ≥ 600V)
Self-extinguishing class UL94:	V0
Insulation resistance:	$>10^9$ Ω (500V DC)

Data according to

UL 1059
300 V - 12 A - 30÷12 AWG stranded for 5 mm (.197 in) pitch
600 V - 12 A - 30÷12 AWG stranded for 10 mm (.394 in) pitch

IEC EN 61984
300 V - 12 A - 2.5 mm² - for 5 mm pitch
600 V - 12 A - 2.5 mm² - for 10 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site **www.sauro.net** or your representative Sales Manager.

Please see "CONNECTORS COMBINATIONS"

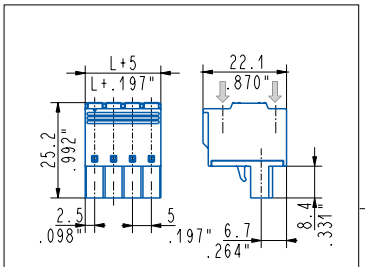



Side stackable, double wire entry
CCF__D01 - 2 ÷ 6 poles, 5 mm / .197" pitch
CCF__D02 - 2 ÷ 3 poles, 10 mm / .394" pitch

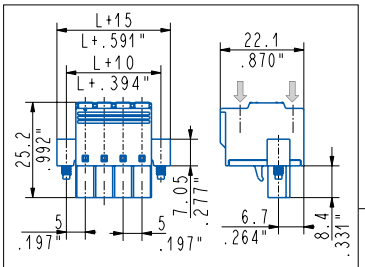



Locking screw flanges, double wire entry
CCF__DV1 - 2 ÷ 6 poles, 5 mm / .197" pitch
CCF__DV2 - 2 ÷ 3 poles, 10 mm / .394" pitch

Usable with:

CIM	CIMH	CPM high	CIMH normo	CGM	CIF-LC1
Page 71	Page 73	Page 75	Page 78	Page 79	Page 84