CCF DOUBLE

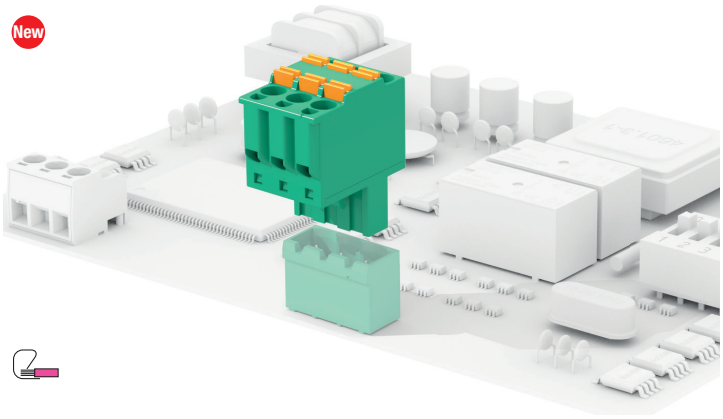

General data

Dimensional class:	medium
Standard colour:	green
Pitches:	metric 5 mm, 10 mm (.197 in, .394 in) imperial 5.08 mm, 10.16 mm (.200 in, .400 in)
Insertion force per pole:	max 3 N (.674 lbf)
Withdrawal force per pole:	min 1,5 N (.337 lbf)
Stripping length:	10 mm (.39 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulation resistance:	$>10^9$ Ω (500V DC)
Insulating material group:	I (CTI ≥ 600V)

Data according to

UL 1059

300 V - 12 A - 30÷12 AWG stranded for 5 mm (.197 in), 5.08 mm (.200 in) pitch
600 V - 12 A - 30÷12 AWG stranded for 10 mm (.394 in) and 10.16 mm (.400 in) pitch

IEC EN 61984

300 V - 12 A - 4kV - 2 - T110 - 2.5 mm² - for 5 mm and 5.08 mm pitch
1000 V - 12 A - 8kV - 2 - T110 - 2.5 mm² - for 10 mm and 10.16 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site **www.sauro.net** or your representative Sales Manager

Your drawings and notes

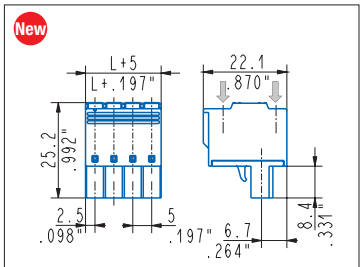

Side stackable, double, female

CCF__D01 - 2 ÷ 5 poles, 5 mm / .197" pitch
CCF__D02 - 1 ÷ 3 poles, 10 mm / .394" pitch

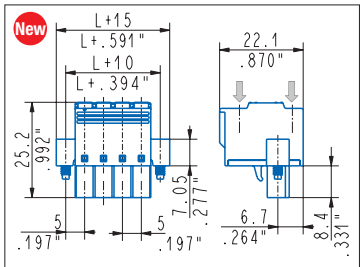

Locking screw flanges, double, female

CCF__DV1 - 2 ÷ 5 poles, 5 mm / .197" pitch
CCF__DV2 - 1 ÷ 3 poles, 10 mm / .394" pitch

Usable with:
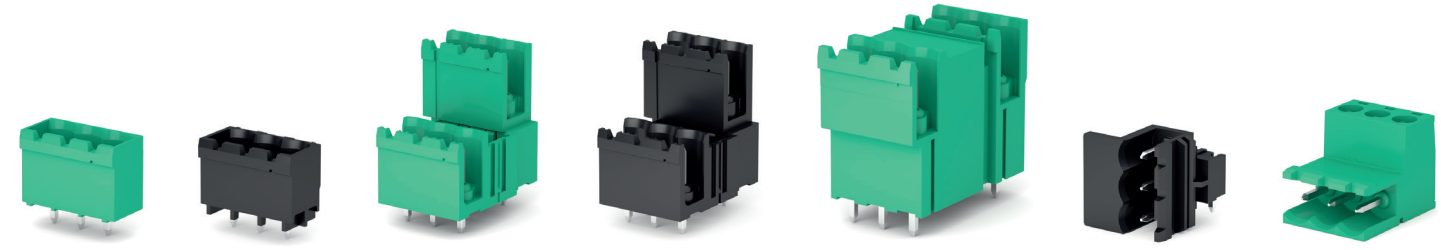
CIM	CIMH	CPM	CPMH	CRM	CIMH normo	CGM
Page 67	Page 69	Page 71	Page 71	Page 72	Page 73	Page 74