

Your drawings and notes

Last release



General data

Dimensional class:	Medium
Standard colour:	green
Pitches:	metric 5, 7.5, 10 mm (.197, .295, .394 in) imperial 5.08, 7.62, 10.16 mm (.200, .300, .400 in)
Screw dimension:	M3
Recommended/Highest tightening torque:	0.5/0.6 Nm (4.42/5.3 lbf-in)
Stripping length:	6 ÷ 7.5 mm (.24 ÷ .30 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulating material group:	I (CTI ≥ 600V)
Self-extinguishing class UL94:	V0
Insulation resistance:	>10 ⁹ Ω (500V DC)

Certifications

UL (n. E167473)

300 V - 15 A - 30÷12 AWG - for 5 mm, 5.08 mm, 7.5 mm and 7.62 mm pitch
600 V - 15 A - 30÷12 AWG - for 10 mm and 10.16 mm pitch

VDE (n. 40027448)

250 V - 16 A - 2.5 mm² - for 5 mm and 5.08 mm pitch
500 V - 16 A - 2.5 mm² - for 7.5 mm and 7.62 mm pitch
750 V - 16 A - 2.5 mm² - for 10 mm and 10.16 mm pitch



IMQ (n. EM672)

300 V - 12 A - 2.5 mm² - for 5 mm and 5.08 mm pitch
600 V - 12 A - 2.5 mm² - for 7.5 mm and 7.62 mm pitch
1000 V - 12 A - 2.5 mm² - for 10 mm and 10.16 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it.
The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site www.sauro.net or your representative Sales Manager.

A higher number of poles is obtained by combining together **modular** parts.

Please see "CONNECTORS COMBINATIONS"

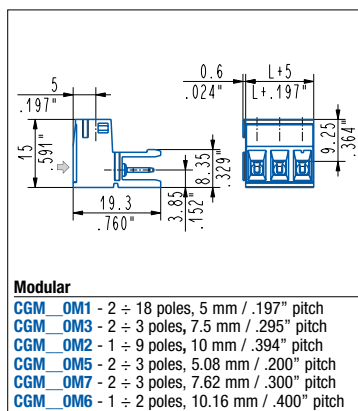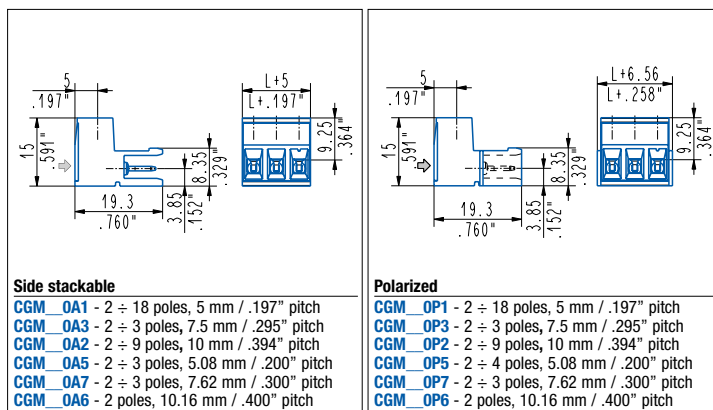

Usable with:

CIF

Page 66

CVF

Page 67

CCF

Page 68

CCF double

Page 69

CGF/CGFH

Page 70

CIM-SC1

Page 83

