

Your drawings and notes

Last release



General data

Dimensional class:	low
Standard colour:	green
Pitches:	metric 3.5 mm, 7 mm (.138 in, .276 in)
Stripping length:	8.5 ÷ 10 mm (.335 ÷ .394 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulating material group:	I (CTI ≥ 600V)
Self-extinguishing class UL94:	V0
Insulation resistance:	>10 ⁹ Ω (500V DC)

Certifications

UL (n. E167473)

150 V - 2 A - 24÷16 AWG for 3.5 mm pitch
 300 V - 2 A - 24÷16 AWG for 7 mm pitch


Data according to

IEC EN 61984

150 V - 4 A - 1.5 mm² for 3.5 mm pitch
 300 V - 4 A - 1.5 mm² for 7 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it.
 The certifications of some product's versions could be pending, for more detailed and updated data
 please refer to our web site www.sauro.net or your representative Sales Manager.

Please see "CONNECTORS COMBINATIONS"

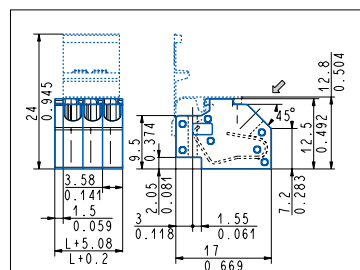

45° with extractor

CHF_008-000E - 2÷11 poles, 3.5 mm / .138" pitch
 CHF_009-000E - 2÷6 poles, 7 mm / .276" pitch



Usable with:

CLMH_0L

Page 57

CLMH_0A

Page 57

