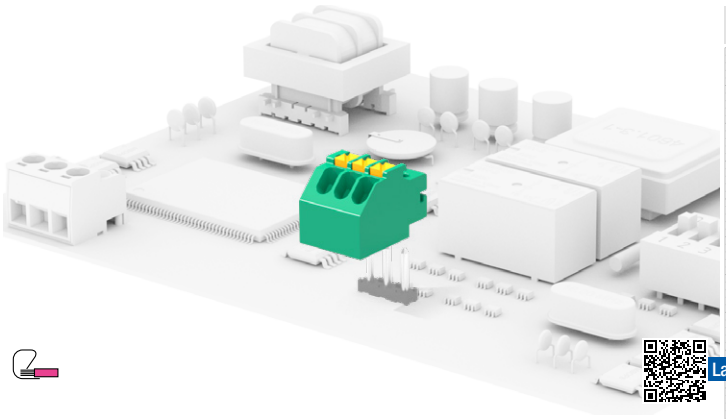

Last release

Your drawings and notes

General data

Dimensional class:	low
Standard colour:	green
Pitches:	metric 3.5 mm, 7 mm (.138 in, .276 in)
Stripping length:	8.5 ÷ 10 mm (.335 ÷ .394 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulating material group:	I (CTI ≥ 600V)
Self-extinguishing class UL94:	V0
Insulation resistance:	>10^9 Ω (500V DC)

Certifications

UL (n. E167473)
150 V - 2 A - 24÷16 AWG for 3.5 mm pitch
300 V - 2 A - 24÷16 AWG for 7 mm pitch

Data according to

IEC EN 61984
150 V - 4 A - 1.5 mm² for 3.5 mm pitch
300 V - 4 A - 1.5 mm² for 7 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site **www.sauro.net** or your representative Sales Manager.

Please see "CONNECTORS COMBINATIONS"

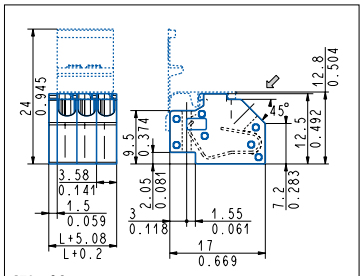

45° with extractor
CHF__008-000E - 2÷11 poles, 3,5 mm / .138" pitch
CHF__009-000E - 2÷6 poles, 7 mm / .276" pitch

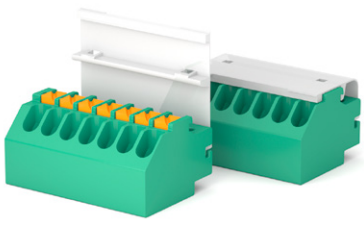

Usable with:

CLMH__0L	CLMH__0A
Page 57	Page 57