


- Traditional for wave soldering
- For resined PCB

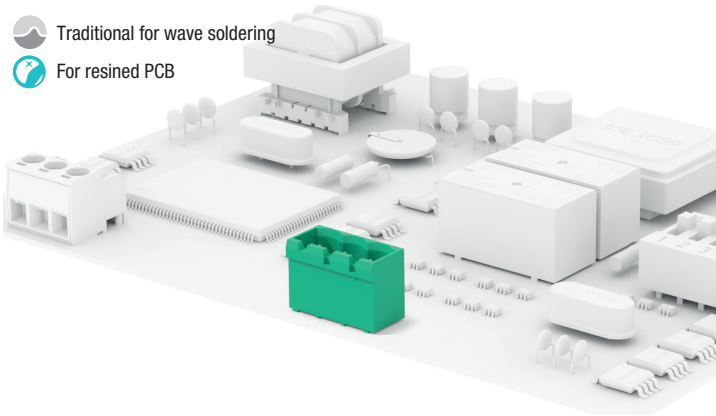

General data

Dimensional class: medium
Standard colour: green
Pitches: metric 5 mm, 7.5 mm, 10 mm (.197 in, .295 in, .394 in)
 imperial 5.08, 7.62, 10.16 mm (.200, .300, .400 in)
Insertion force per pole: max 3 N (.674 lbf)
Withdrawal force per pole: min 1,5 N (.337 lbf)
PCB thickness: max 2.4 mm (.094 in)
PCB hole diameter: min 1.4 mm (.055 in)
Operating temperature range: -40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance: <15 mΩ
Insulation resistance: >10⁹ Ω (500V DC)
Insulating material group: I (CTI ≥ 600V)

Certifications

UL (n. E167473)

300 V - 15 A - for 5 mm, 5.08 mm, 7.5 mm and 7.62 mm pitch
 600 V - 15 A - for 10 mm and 10.16 mm pitch

VDE (n. 40027448)

250 V - 16 A - 2.5 mm² - T100 - 2.5 kV - 2 for 5 mm and 5.08 mm pitch
 500 V - 16 A - 2.5 mm² - T100 - 4 kV - 2 for 7.5 mm and 7.62 mm pitch
 750 V - 16 A - 2.5 mm² - T100 - 6 kV - 2 for 10 mm and 10.16 mm pitch

IMQ (n. EM672)

300 V - 12 A - 2.5 mm² - T110 - 4kV - III/2 for 5 mm and 5.08 mm pitch
 600 V - 12 A - 2.5 mm² - T110 - 6kV - III/2 for 7.5 mm and 7.62 mm pitch
 1000 V - 12 A - 2.5 mm² - T110 - 8kV - III/22 for 10 mm and 10.16 mm pitch

CSA (n. LR102896)

300 V - 15 A - for 5 mm, 5.08 mm, 7.5 mm and 7.62 mm pitch
 600 V - 15 A - for 10 mm and 10.16 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site www.sauro.net or your representative Sales Manager

