



- Traditional for wave soldering
- For resined PCB

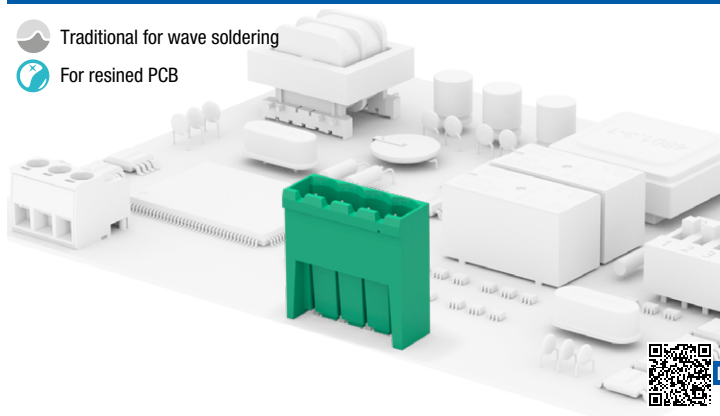

Last release

Your drawings and notes

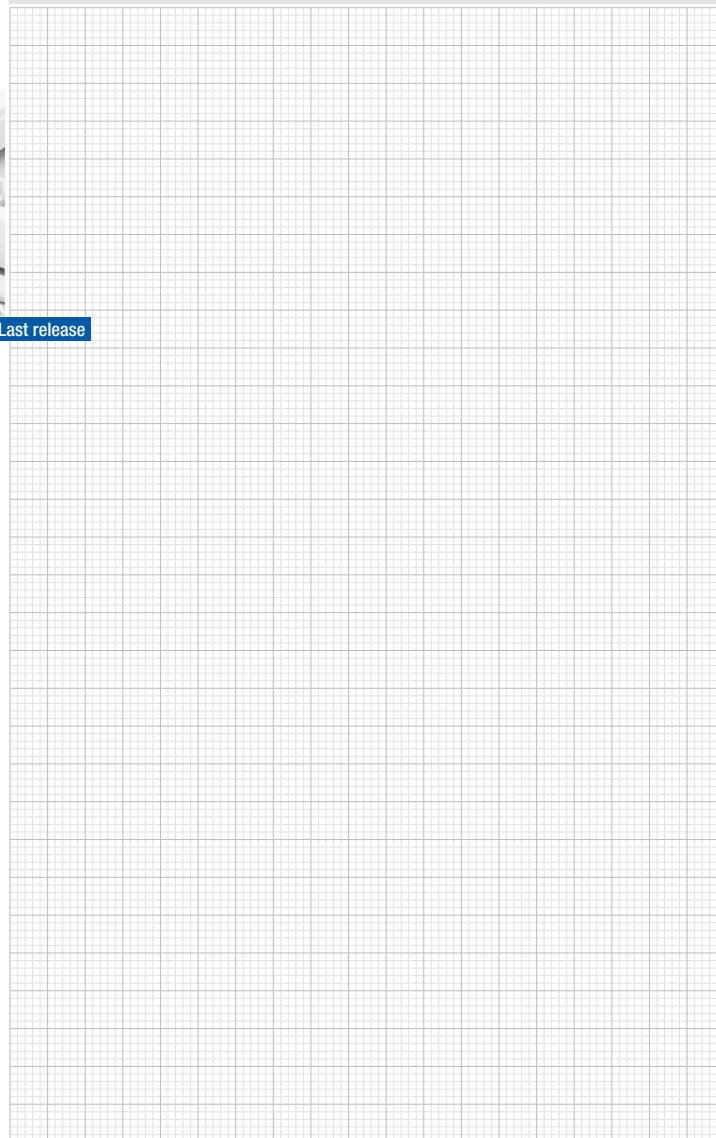

General data

Dimensional class:	medium
Standard colour:	green
Pitches:	metric 5 mm, 10 mm (.197 in, .394 in)
PCB thickness:	max 2.4 mm (.094 in)
PCB hole diameter:	min 1.4 mm (.055 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulating material group:	I (CTI ≥ 600V)
Self-extinguishing class UL94:	V0
Insulation resistance:	>10 ⁹ Ω (500V DC)

Data according to

UL 1059


300 V - 12 A - for 5 mm pitch
600 V - 12 A - for 10 mm pitch

IEC EN 61984

300 V - 12 A - 5 mm pitch
1000 V - 12 A - 10 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site www.sauro.net or your representative Sales Manager.

Please see "CONNECTORS COMBINATIONS"

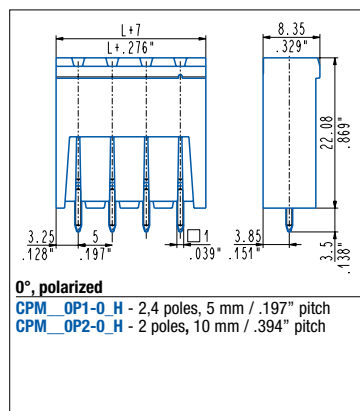

Usable with:

CIF

Page 66

CVF

Page 67

CCF

Page 68

CCF double

Page 69

CGF

Page 70

CIM-SC1

Page 84

