

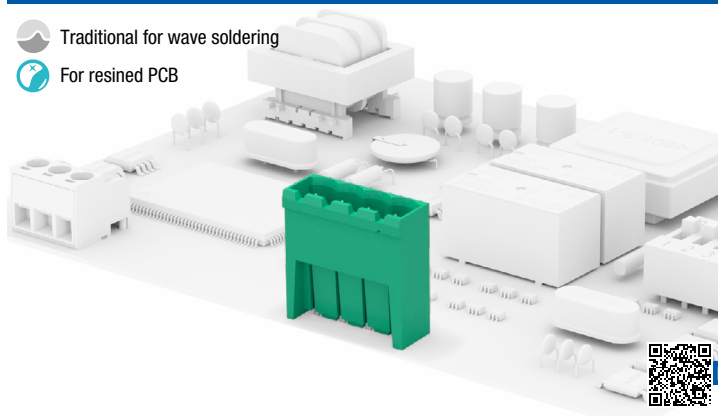


-  Traditional for wave soldering
 For resined PCB



Your drawings and notes

Last release

General data

Dimensional class:	medium
Standard colour:	green
Pitches:	metric 5 mm, 10 mm (.197 in, .394 in)
PCB thickness:	max 2.4 mm (.094 in)
PCB hole diameter:	min 1.4 mm (.055 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulating material group:	I (CTI ≥ 600V)
Self-extinguishing class UL94:	V0
Insulation resistance:	>10 ⁹ Ω (500V DC)

Data according to**UL 1059**


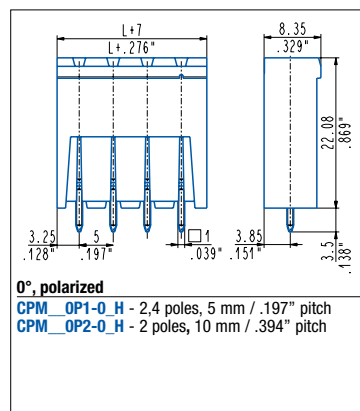
300 V - 12 A - for 5 mm pitch
 600 V - 12 A - for 10 mm pitch

IEC EN 61984

300 V - 12 A - 5 mm pitch
 1000 V - 12 A - 10 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it.
 The certifications of some product's versions could be pending, for more detailed and updated data
 please refer to our web site www.sauro.net or your representative Sales Manager.

Please see "CONNECTORS COMBINATIONS"

**Usable with:****CIF**

Page 66

CVF

Page 67

CCF

Page 68

CCF double

Page 69

CGF

Page 70

CIM-SC1

Page 84

