



- Traditional for wave soldering
- For resined PCB

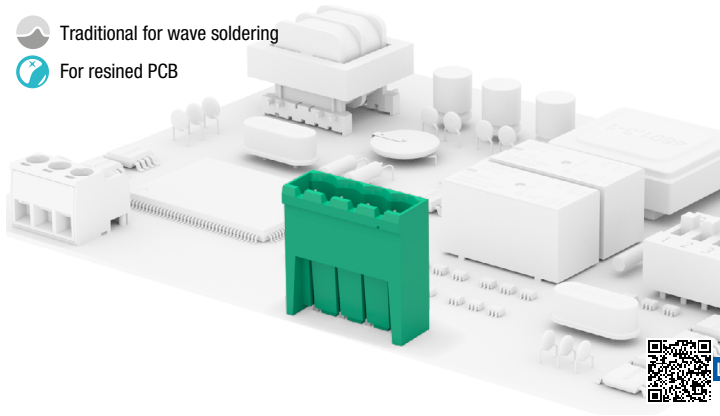

Last release

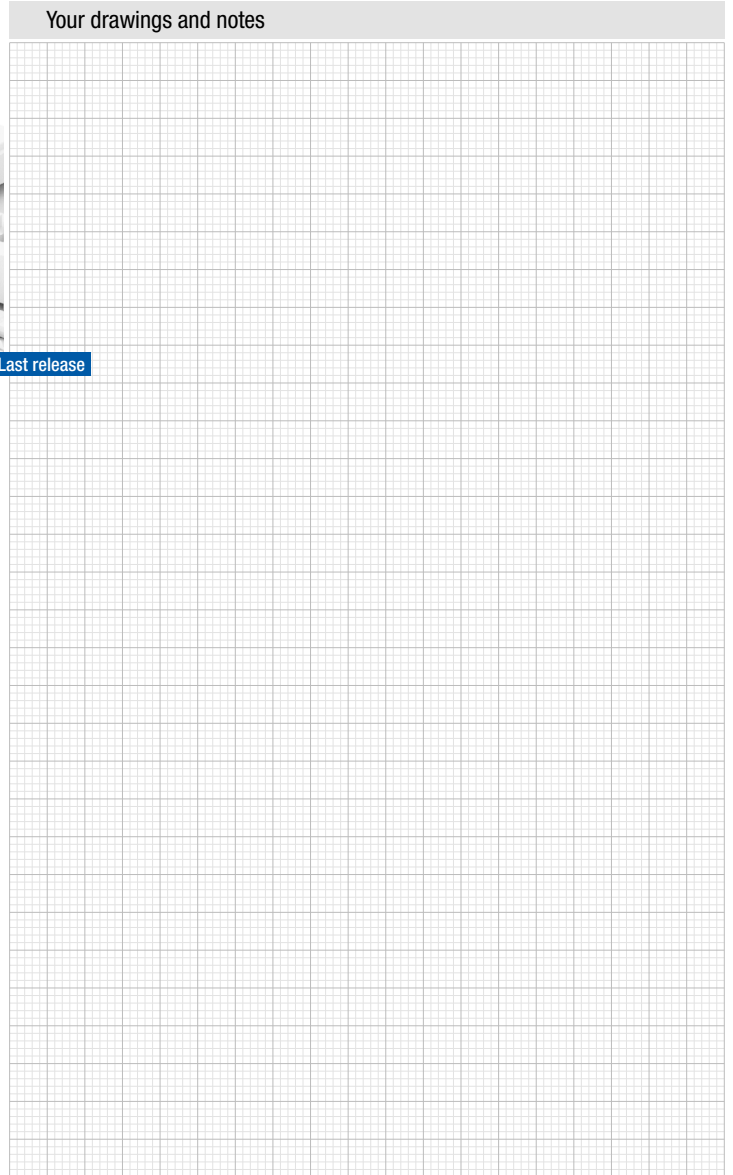

General data

Dimensional class:	medium
Standard colour:	green
Pitches:	metric 5 mm, 10 mm (.197 in, .394 in)
PCB thickness:	max 2.4 mm (.094 in)
PCB hole diameter:	min 1.4 mm (.055 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulating material group:	I (CTI ≥ 600V)
Self-extinguishing class UL94:	V0
Insulation resistance:	>10 ⁹ Ω (500V DC)



Data according to

UL 1059
 300 V - 12 A - for 5 mm pitch
 600 V - 12 A - for 10 mm pitch

IEC EN 61984
 300 V - 12 A - 5 mm pitch
 1000 V - 12 A - 10 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site www.sauro.net or your representative Sales Manager.

Please see "CONNECTORS COMBINATIONS"

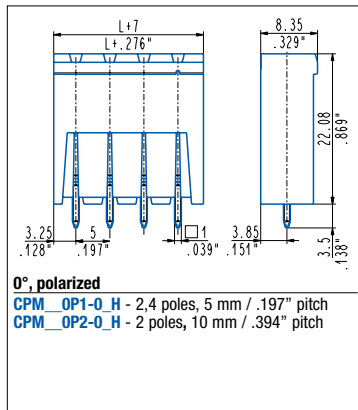

Usable with:

- CIF**
Page 63
- CVF**
Page 64
- CCF**
Page 65
- CCF double**
Page 66
- CGF**
Page 67
- CIM-SC1**
Page 80

