CRM

Traditional for wave soldering

For resined PCB

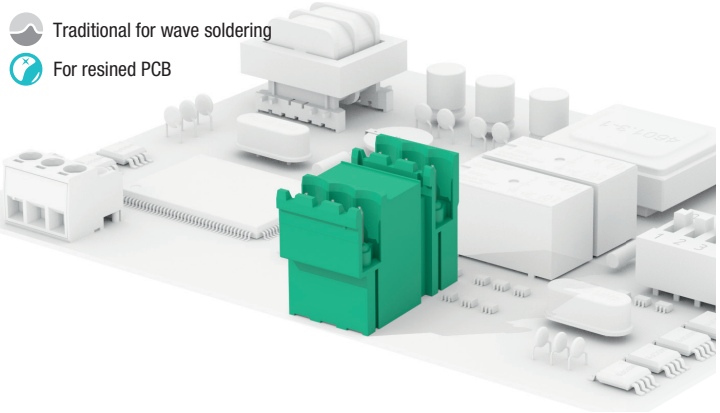

Your drawings and notes

General data

Dimensional class:	medium
Standard colour:	green
Pitches:	metric 5 mm, 10 mm (.197 in, .394 in) imperial 5.08 mm, 10.16 mm (.200 in, .400 in)
Insertion force per pole:	max 3 N (.674 lbf)
Withdrawal force per pole:	min 1,5 N (.337 lbf)
PCB thickness:	max 2.4 mm (.094 in)
PCB hole diameter:	min 1.4 mm (.055 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulation resistance:	>10^9 Ω (500V DC)
Insulating material group:	I (CTI ≥ 600V)

Certifications

UL (n. E167473)
300 V - 15 A - for 5 mm and 5.08 mm pitch
600 V - 15 A - for 10 mm and 10.16 mm pitch

VDE (n. 40027448)
250 V - 16 A - 2.5 mm² - T75 - 2,5kV - 2 for 5 mm and 5.08 mm pitch
750 V - 16 A - 2.5 mm² - T75 - 6kV - 2 for 10 mm and 10.16 mm pitch

IMQ (n. EM672)
300 V - 12 A - 2.5 mm² - T110 - 4kV - III/2 for 5 mm and 5.08 mm pitch
1000 V - 12 A - 2.5 mm² - T110 - 8kV - III/2 for 10 mm and 10.16 mm pitch

CSA (n. LR102896)
300 V - 15 A - for 5 mm and 5.08 mm pitch
600 V - 15 A - for 10 mm and 10.16 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site **www.sauro.net** or your representative Sales Manager

N.B.: For a higher number of poles, the product will be supplied already side-stacked.

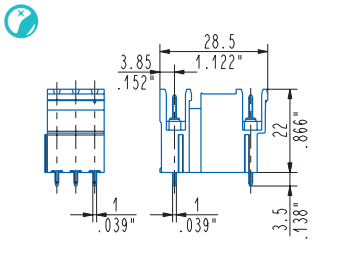

Straight, modular male
CRM__0M1 - 2 ÷ 3 poles, 5 mm / .197" pitch
CRM__0M2 - 1 ÷ 2 poles, 10 mm / .394" pitch
CRM__0M5 - 2 ÷ 3 poles, 5.08 mm / .200" pitch
CRM__0M6 - 1 ÷ 2 poles, 10.16 mm / .400" pitch

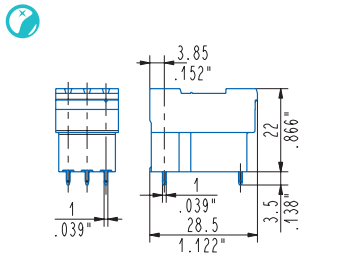

Straight, polarized male
CRM__0P1 - 2 ÷ 25 poles, 5 mm / .197" pitch
CRM__0P2 - 1 ÷ 2 poles, 10 mm / .394" pitch
CRM__0P5 - 2 ÷ 25 poles, 5.08 mm / .200" pitch
CRM__0P6 - 1 ÷ 2 poles, 10.16 mm / .400" pitch

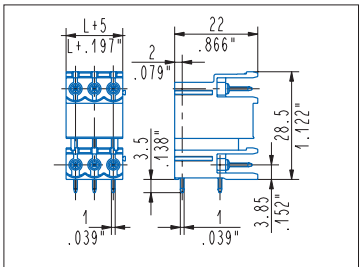

90°, modular male
CRM__9M1 - 2 ÷ 3 poles, 5 mm / .197" pitch
CRM__9M2 - 1 ÷ 2 poles, 10 mm / .394" pitch
CRM__9M5 - 2 ÷ 3 poles, 5.08 mm / .200" pitch
CRM__9M6 - 1 ÷ 2 poles, 10.16 mm / .400" pitch

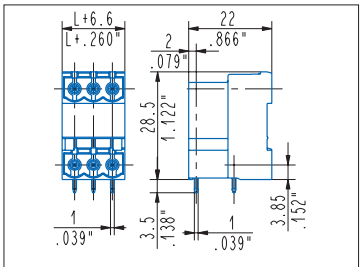

90°, polarized male
CRM__9P1 - 2 ÷ 25 poles, 5 mm / .197" pitch
CRM__9P2 - 1 ÷ 2 poles, 10 mm / .394" pitch
CRM__9P5 - 2 ÷ 25 poles, 5.08 mm / .200" pitch
CRM__9P6 - 1 ÷ 2 poles, 10.16 mm / .400" pitch

Usable with:

CIF	CVF	CCF	CCF double	CGF	CGFH
Page 61	Page 62	Page 63	Page 64	Page 65	Page 66