


Last release

Your drawings and notes

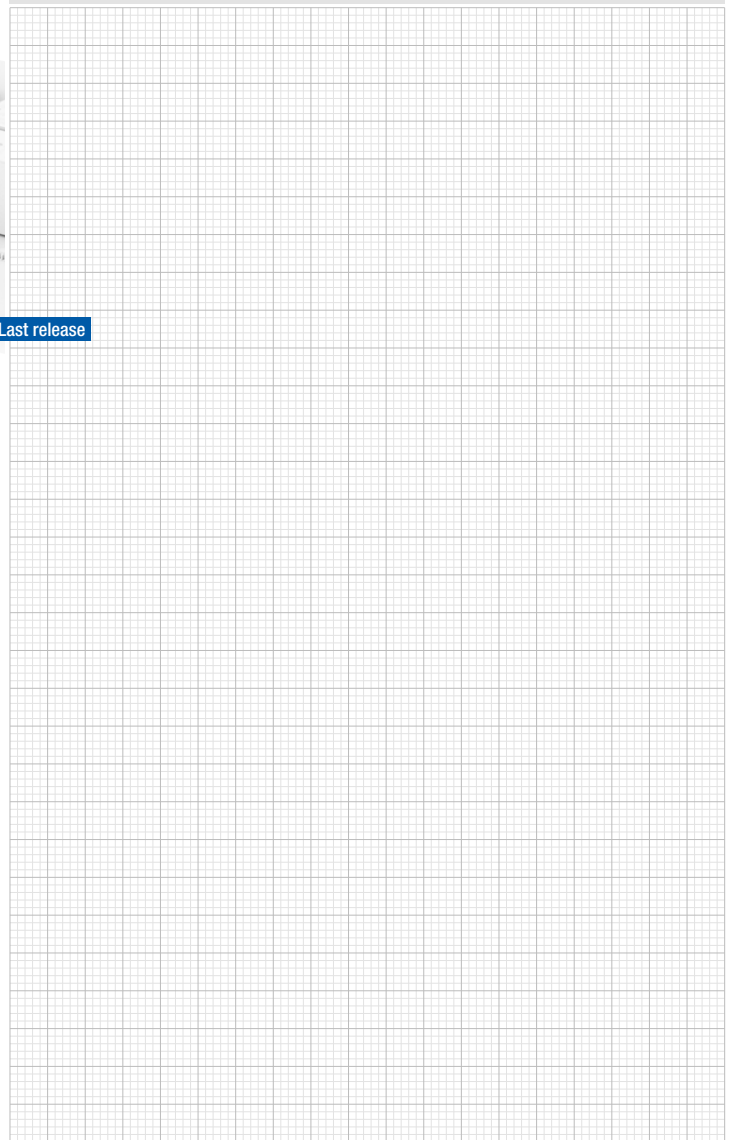

General data

Dimensional class:	low
Standard colour:	green for wave soldering, black for reflow soldering
Pitches:	metric 3.5, 7 mm (.138, .276 in)
PCB thickness:	max 2.4 mm (.094 in)
PCB hole diameter:	min. 1.2 mm (.055 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulating material group:	I (CTI ≥ 600V)
Self-extinguishing class UL94:	V0
Insulation resistance:	>10 ⁹ Ω (500V DC)

Certifications



UL (n. E167473)
300 V - 11 A

Data according to

IEC EN 61984
150 V - 11 A

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site www.sauro.net or your representative Sales Manager.

Please see "CONNECTORS COMBINATIONS"

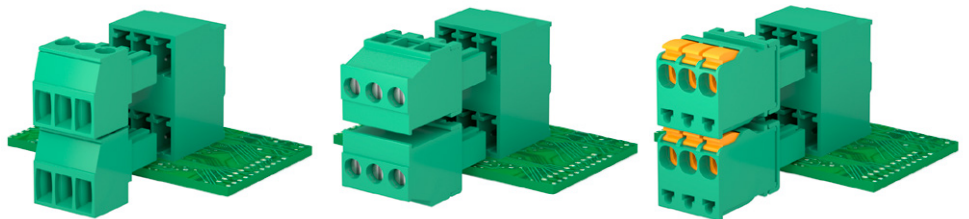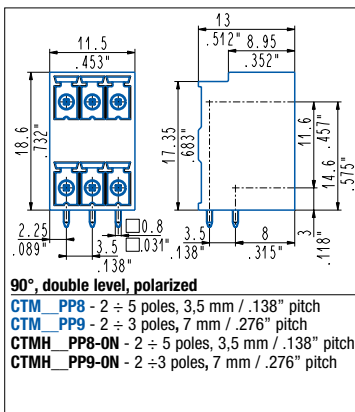

Usable with:

CTF

Page 58

CKF

Page 59

CBF

Page 61

