


New Height < 8 mm / 0.315"

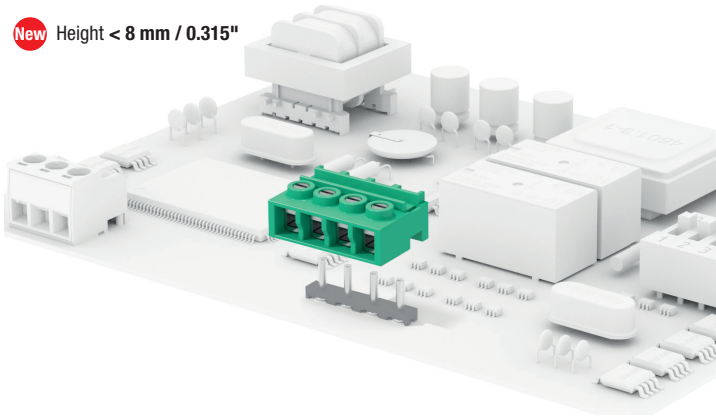

General data



Dimensional class:	low
Standard colour:	green
Pitches:	metric 5 mm (.197 in)
Screw dimension:	M3
Insertion force per pole:	max 2 N (max .450 lbf)
Withdrawal force per pole:	min 1,2 N (min .270 lbf)
Recommended/highest tightening torque:	0.5/0.6 Nm (4.42/5.30 lbf-in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulation resistance:	>10 ⁹ Ω (500V DC)
Insulating material group:	I (CTI ≥ 600V)

Data according to

UL 1059
300 V - 12 A - 28÷16 AWG

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site www.sauro.net or your representative Sales Manager

Your drawings and notes

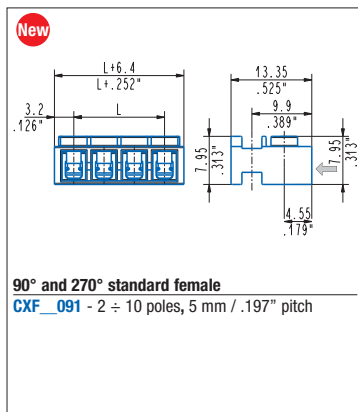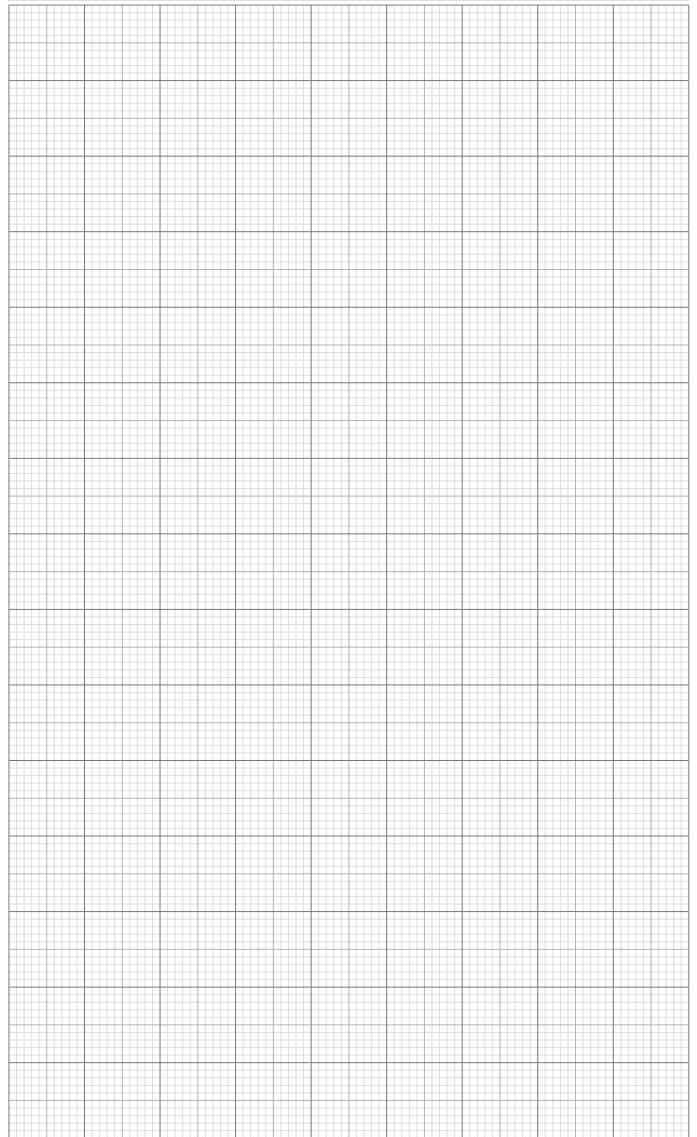

Usable with:

CSM

Page 48

CSMH

Page 48

CSMD

Page 49

